




USER MANUAL

ITX CROSS MOUNT

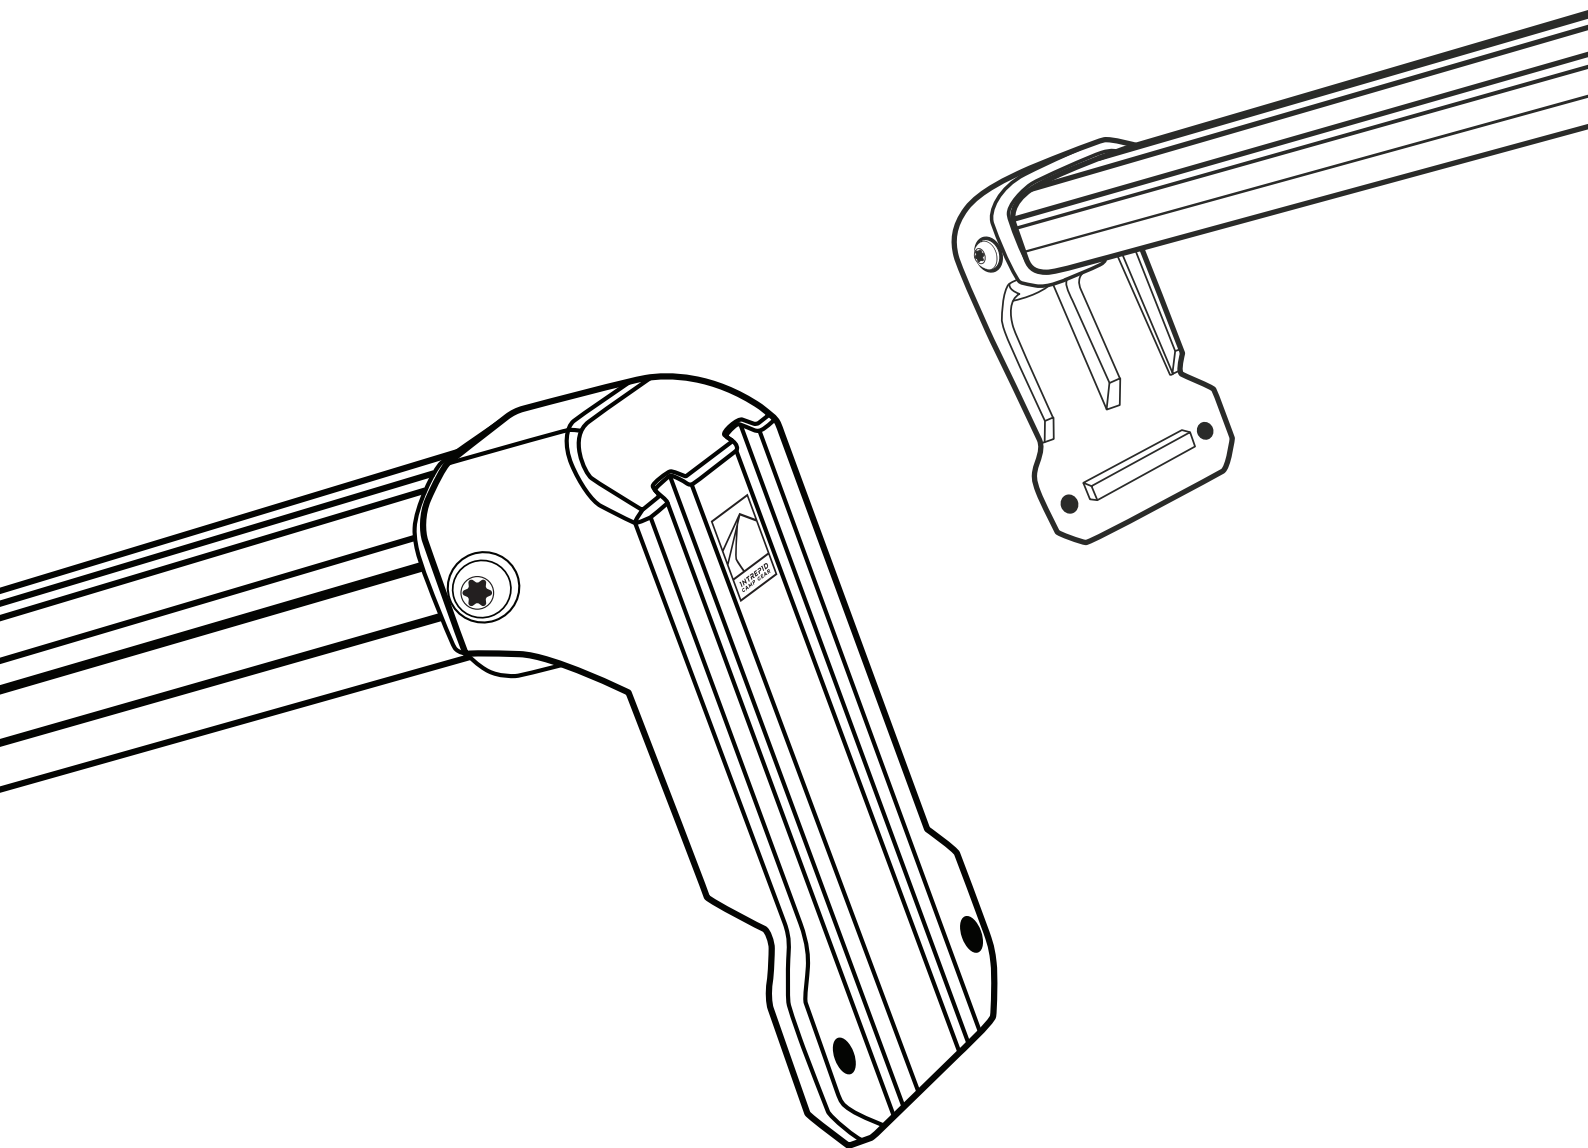


COMPONENTS




1. Top cross bar




2. Torx plus T30 IP wrench

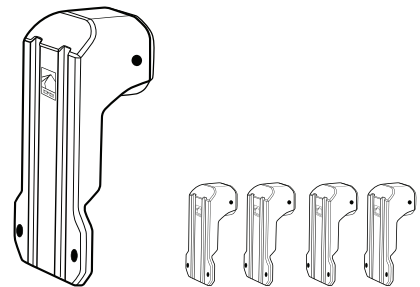


5. Side bracket

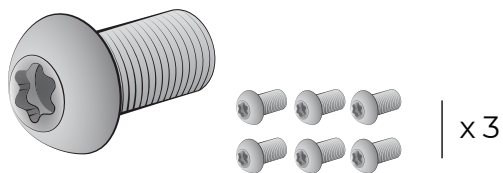

3. M6 bolt torx head:

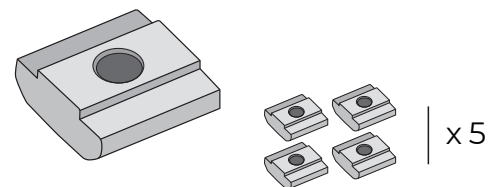


6. M6 T-nut

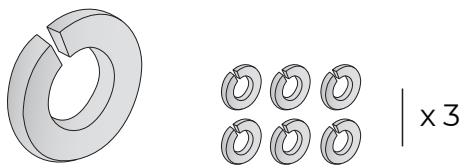

4. Spring washer

INSTALLING THE CROSS MOUNT RTT


STEP 1 T-NUTS INSERTION

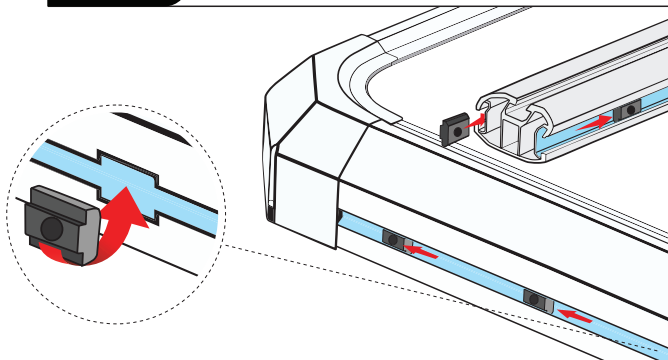

Insert x2 T-Nuts into the groove of the top frame where you want to install the Top Crossbar Side Bracket.

Insert x2 T-Nuts into the groove of the Top Crossbar.


CROSSBAR & SIDE BRACKET ASSEMBLY STEP 2

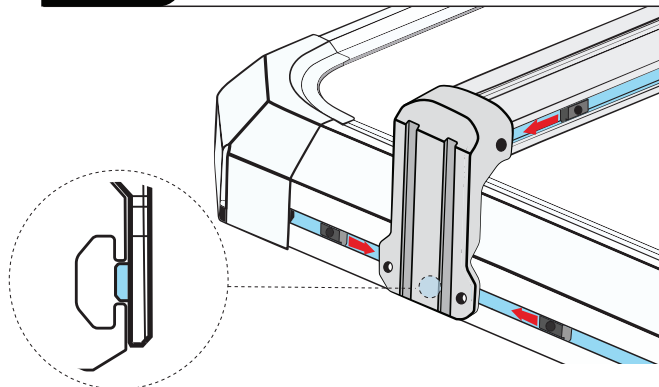

After mounting the side bracket to the crossbar, adjust x2 bolts and x2 washers as the picture shows, then tighten it into the T-nut.


STEP 3 ASSEMBLY TO FRAME

NUT STOPPER

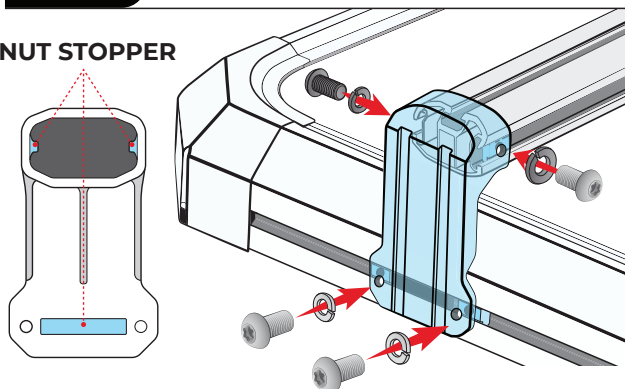

Insert x2 bolts and x2 washers into the groove of the top frame as the picture shows, then tighten it.



STEP 4 ASSEMBLY

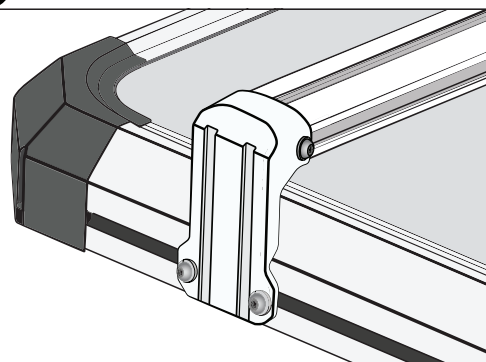




To ensure that the crossbar is stable enough for you to attach the other side, we recommend attaching one side first.

DIMENSION

Two indication lines have been etched on both ends of the top crossbar to make sure that side brackets are fully inserted when mounting.
Lines should not be visible after assembly.

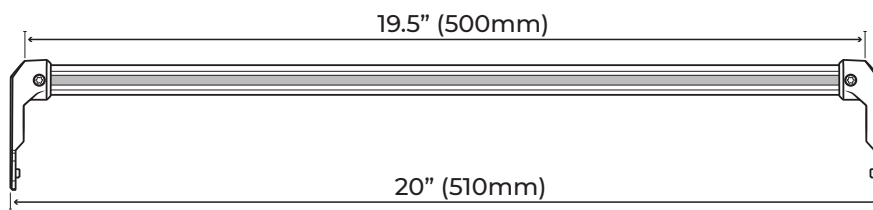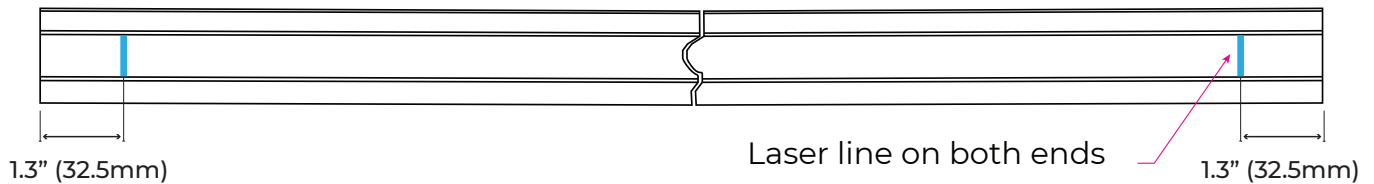

15.9" (40.5mm)

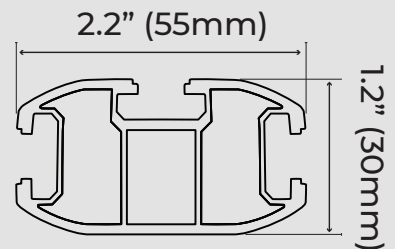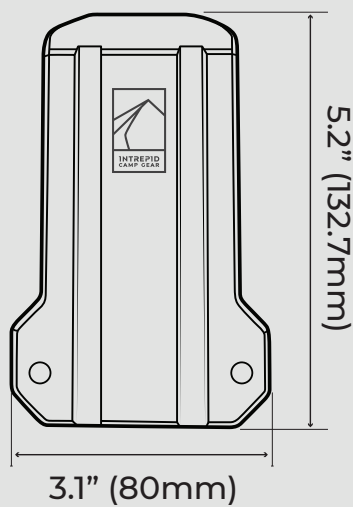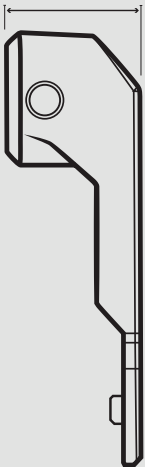



<https://intrepidcampgear.com/>